





The **LG2 DC** rack has been designed to provide users with a high-end solution for data centers. Designed for greater and easy wiring control.

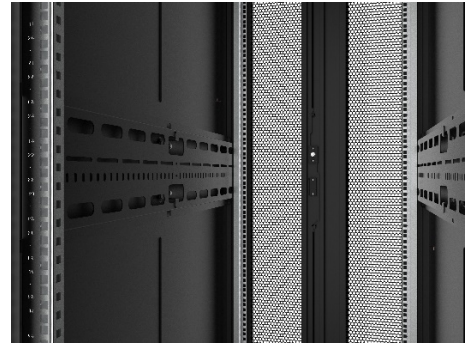

Strengths

- Data Center Rack.
- Available in various sizes.
- Easy assembly, no tools.
- Aluminium structure and high-strength cast iron corners.
- Maximum load 1500 kg

Color: Black RAL 9005 Textured



Measurement

- Height: 42, 47U
- Width: 600, 800 mm
- Depth: 800, 1000, 1200 mm

Construction

- Assembly

Load capacity

- 1500 kg

19" Profiles

- 2 pairs of sliding 19" extrusions, adjustable from inside
- Optional 19" server extrusions, and high load extrusions (Not included)

IP protection rating

- IP20 Standard

Colors

- Black RAL 9005

Front Door

- 86% hexagonal perforated plate door, with hinged handle
- Optional: safety glass door, smooth sheet metal and double leaf
- Easy repositioning for right or left opening
- Opening angle 190°

Back door

- Double leaf doors in 86% hexagonal perforated sheet, with folding handle
- Opening angle 190°
- Optional: safety glass door, smooth sheet metal and hexagonal perforated sheet

Side panels

- Removable, by means of plastic locks and metal locks
- Double, for greater access to the inside of the rack

Adjustable feet

- Available wheels (Not included)


Removable openings – Cable entry




- Top opening, depending on size
- The opening can be plugged with a blind panel and two brushes



Code	H (U)	Maximum load (kg)	Dimensions (mm)				Doors		Dimensions, including packaging (mm)			Net weight
			H1	W	D	Useful depth ²	Front	Rear	H1	W	D	
32312428	42	1500	1993	600	800	735	PPH	SPPH	1993	630	830	80
32312421	42	1500	1993	600	1000	935	PPH	SPPH	1993	630	1030	90
32312422	42	1500	1993	600	1200	1135	PPH	SPPH	1993	800	1200	100
32312478	47	1500	2215	600	800	735	PPH	SPPH	2215	630	830	88
32312471	47	1500	2215	600	1000	935	PPH	SPPH	2215	630	1030	98
32312472	47	1500	2215	600	1200	1135	PPH	SPPH	2215	800	1200	108
32313428	42	1500	1993	800	800	735	PPH	SPPH	1993	830	830	92
32312421	42	1500	1993	800	1000	935	PPH	SPPH	1993	830	1030	102
32312422	42	1500	1993	800	1200	1135	PPH	SPPH	1993	800	1200	112
32313478	47	1500	2215	800	800	735	PPH	SPPH	2215	830	830	100
32313471	47	1500	2215	800	1000	935	PPH	SPPH	2215	830	1030	110
32313472	47	1500	2215	800	1200	1135	PPH	SPPH	2215	800	1200	120


H1: Height in mm without feet, with feet add 28.5-85mm.

Useful depth²: May vary according to the set of doors.




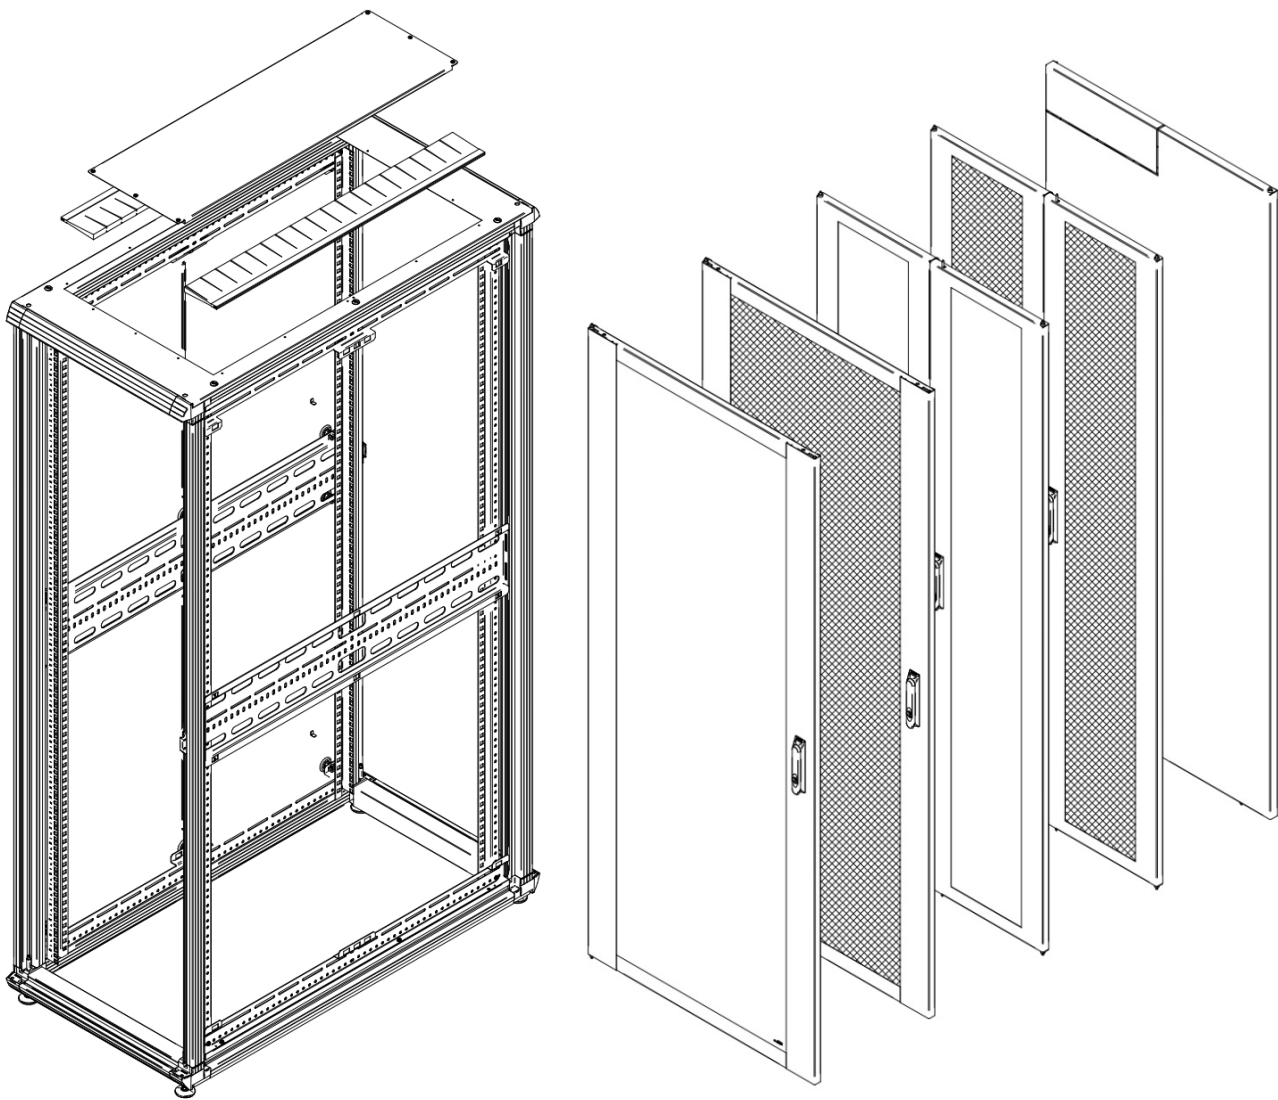


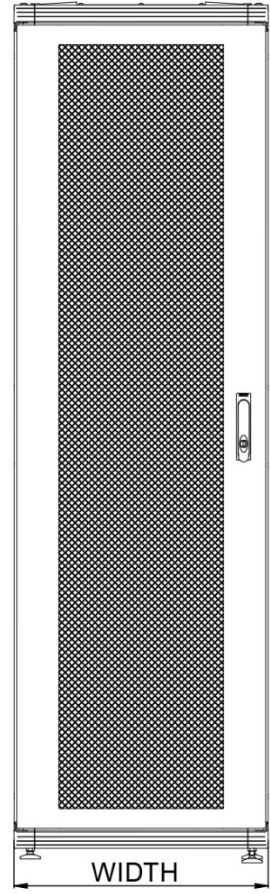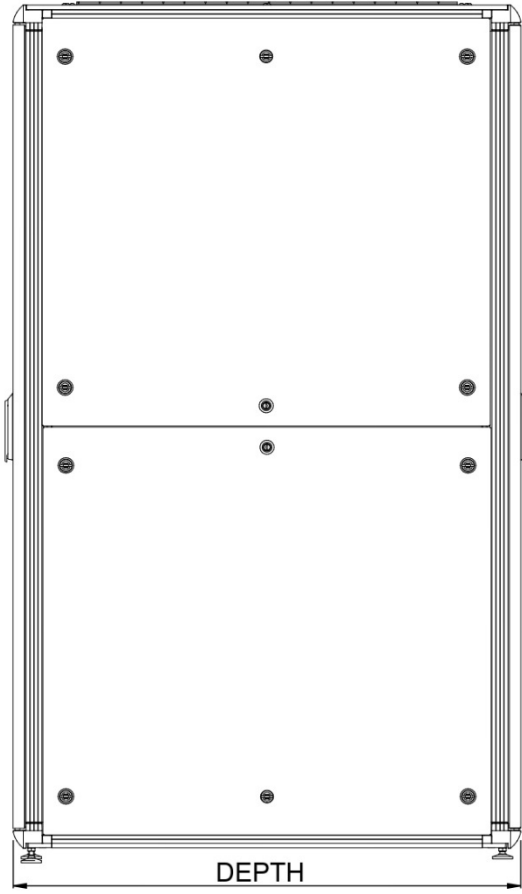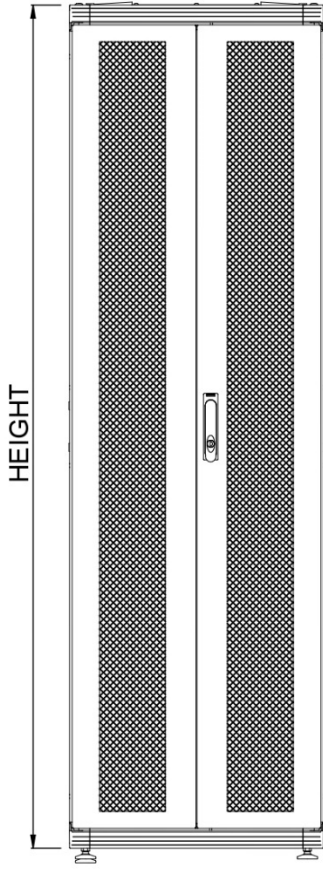

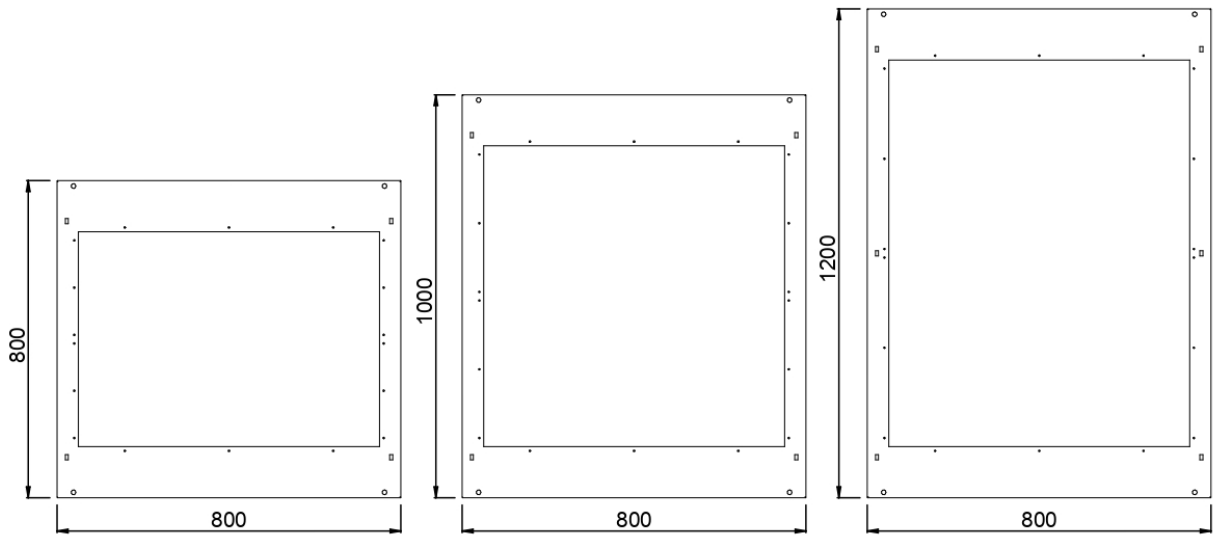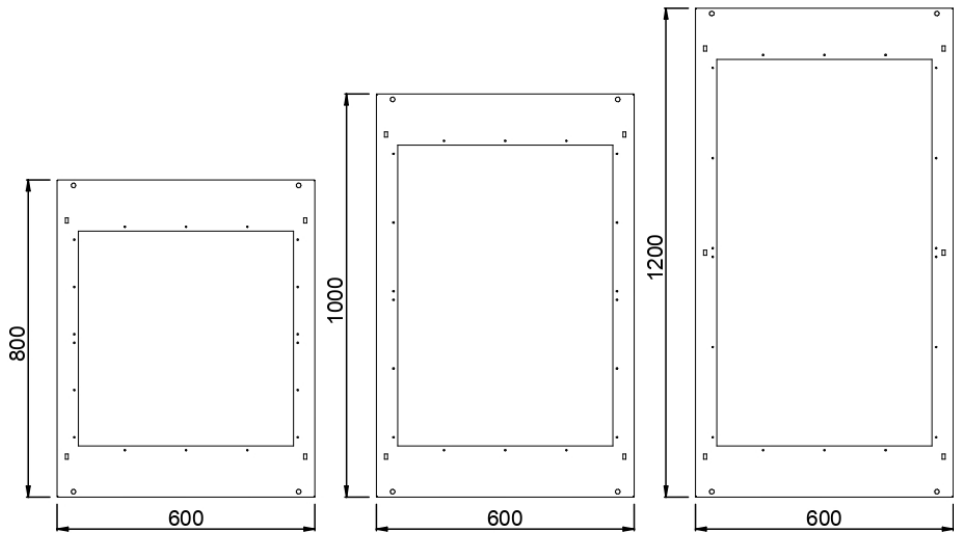

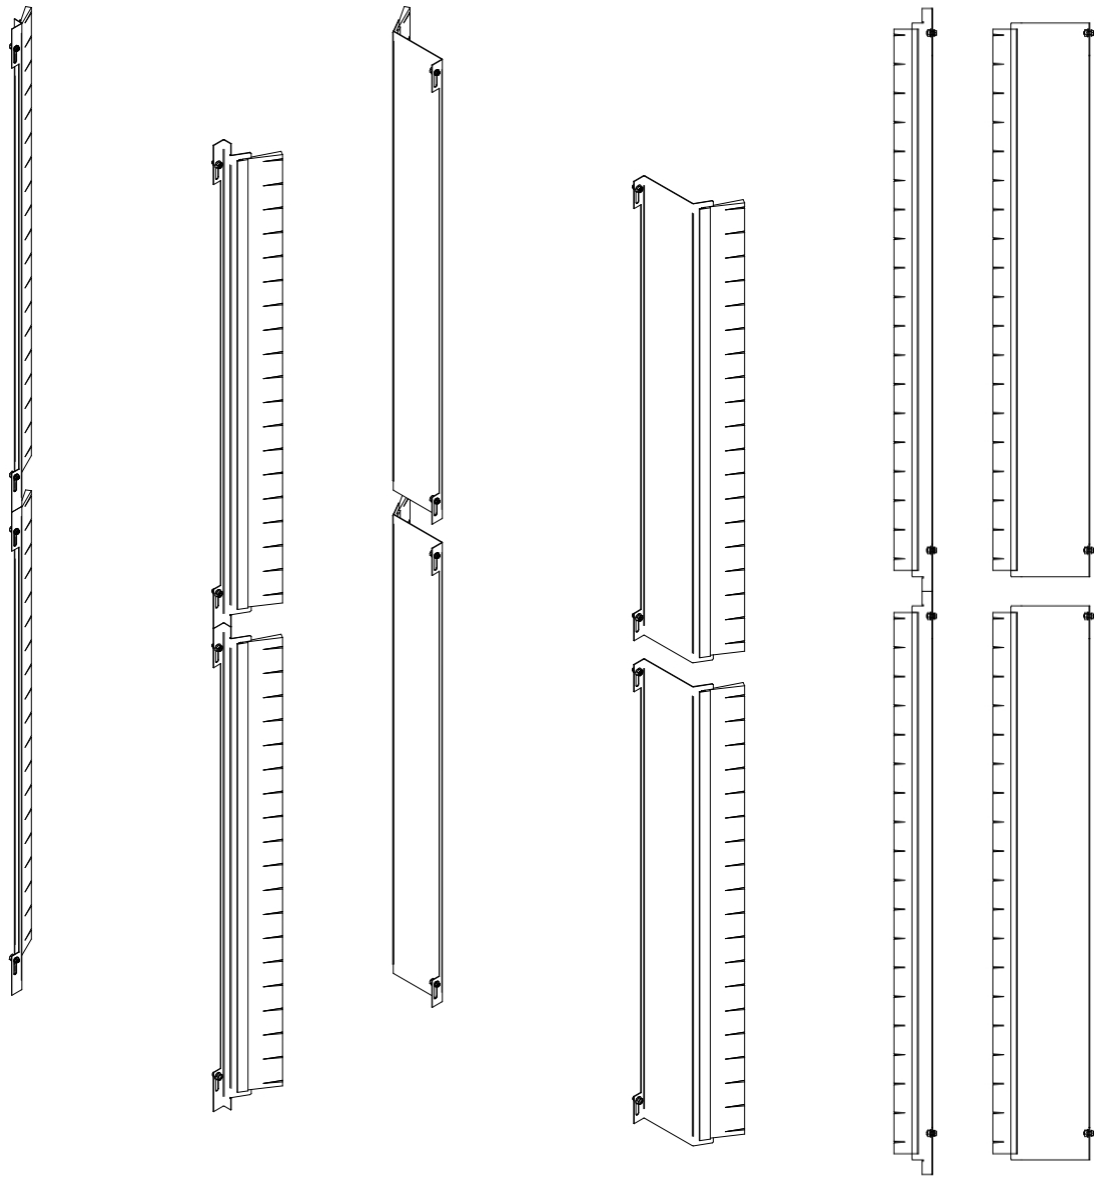

AIR-STOPPERS KIT W600 AND W800

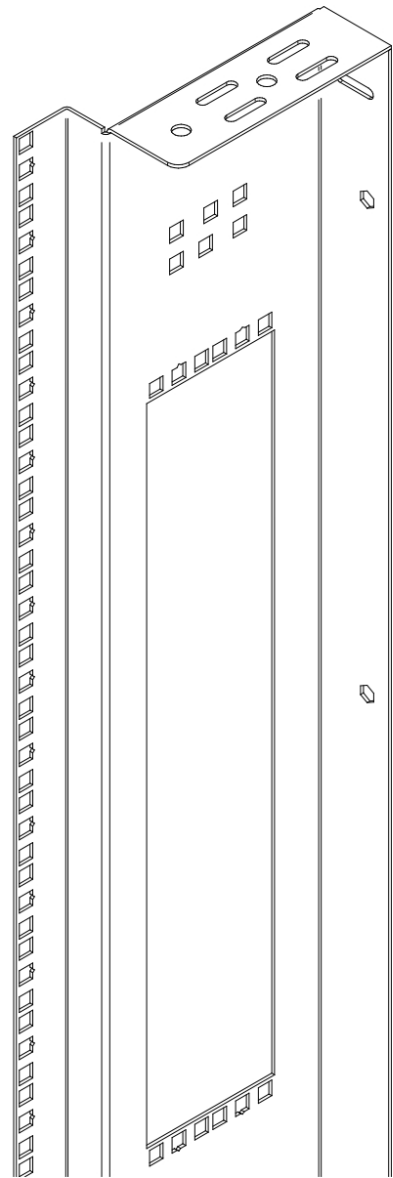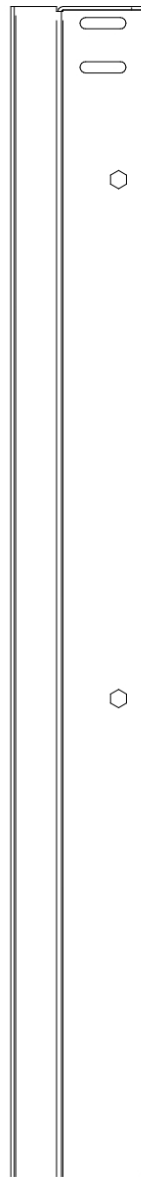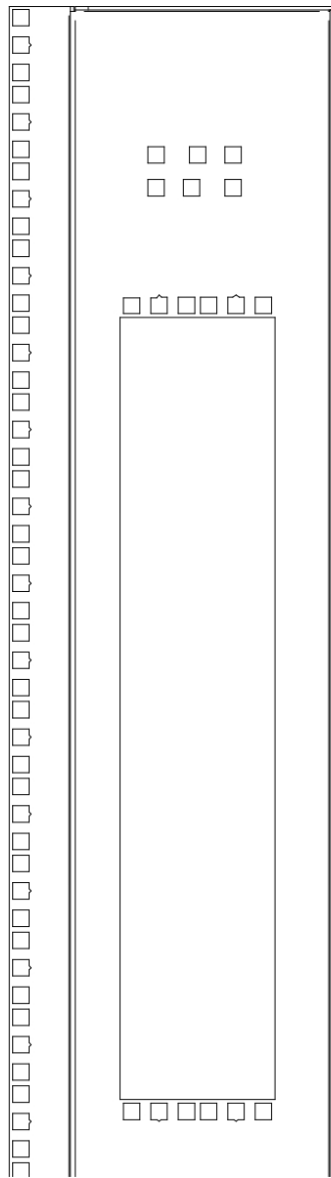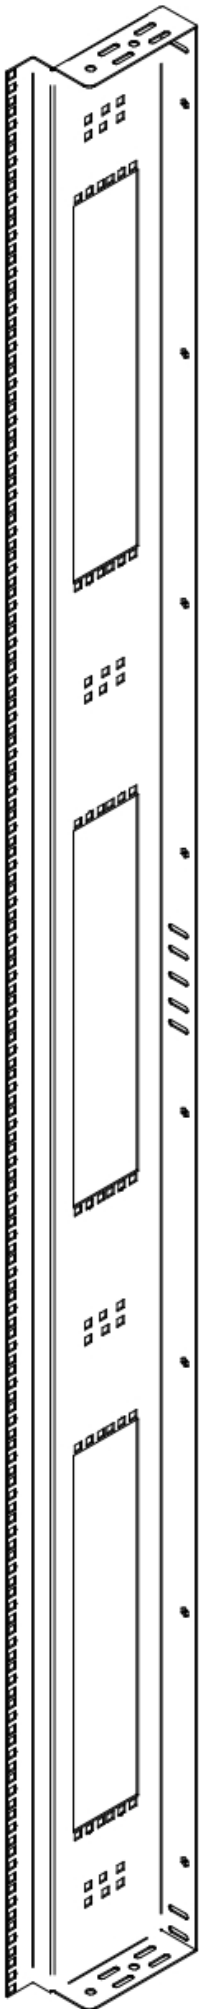

19" HIGH LOAD EXTRUSIONS