




SR2 DC A600 47U F1200


The **SR2 DC** rack has been designed to bring a multi-purpose rack with great value for money to data centers. It offers greater adaptability to data centers while maintaining the essence of its predecessor, the SR2.

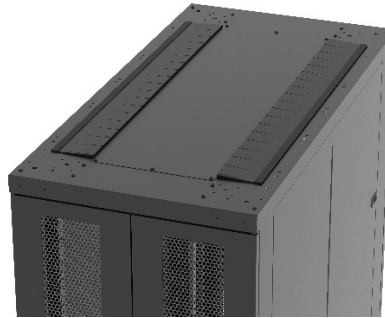

### Strengths

- Universal rack, designed specifically for data centers
- Large openings for wiring
- Pre-configured rack with wide range of optional accessories
- With various options of air flow control accessories
- Great accessibility to the inside of the rack
- Increased robustness, up to 1500 kg (static load)

Color: Black RAL 9005 Textured



### Measurement

- Height: 42, 47U
- Width: 600, 800 mm
- Depth: 800, 1000, 1200 mm

### Construction

- Assembly

### Load capacity

- 1200 kg

### 19" Profiles

- 2 pairs of sliding 19" extrusions, adjustable from inside
- Optional 19" server extrusions, and high load extrusions (Not included)

### IP protection rating

- IP20 Standard

### Colors

- Black RAL 9005

### Front Door

- Hexagonal plate door with 86% ventilation.
- Folding handle – cylinder 333
- Optional: glass, smooth sheet metal and double-leaf door
- Easy repositioning for right or left opening
- Opening angle 190°

### Back door

- Double hexagonal plate door with 86% ventilation.
- With 190° angular aperture
- Optional: glass, smooth sheet metal and double leaf door

### Side panels

- Removable, with lock and sliding latches
- Split lids, for greater accessibility to the interior

### Adjustable feet


- Available wheels (Not included)


### Removable openings – Cable entry



- Large top and bottom openings. In width 600: 258x68 mm. In width 800: 408x68 mm.
- Placket included to partially cover the top opening.
- Partition of openings into 4 areas available (Not included)
- Protection by brushes (2 included)


Code	H (in U)	Load rating (kg)	Dimensions (mm)				Doors		Dimensions including packing (mm)			Gross weight (kg)
			H <sup>1</sup>	W	D	Useful depth	Front	Rear	H	W	D	
32442042	42	1300	2000	600	1000	940	PPH	SPPH	2150	630	1030	93
32442047	47	1300	2222	600	1200	1140	PPH	SPPH	2365	800	1200	104
32443042	42	1300	2000	800	800	740	PPH	SPPH	2150	830	830	98
32443047	47	1300	2222	800	1200	1140	PPH	SPPH	2365	800	1200	110

H<sup>1</sup>: Height in mm without feet, for feet add 28,5-85 mm




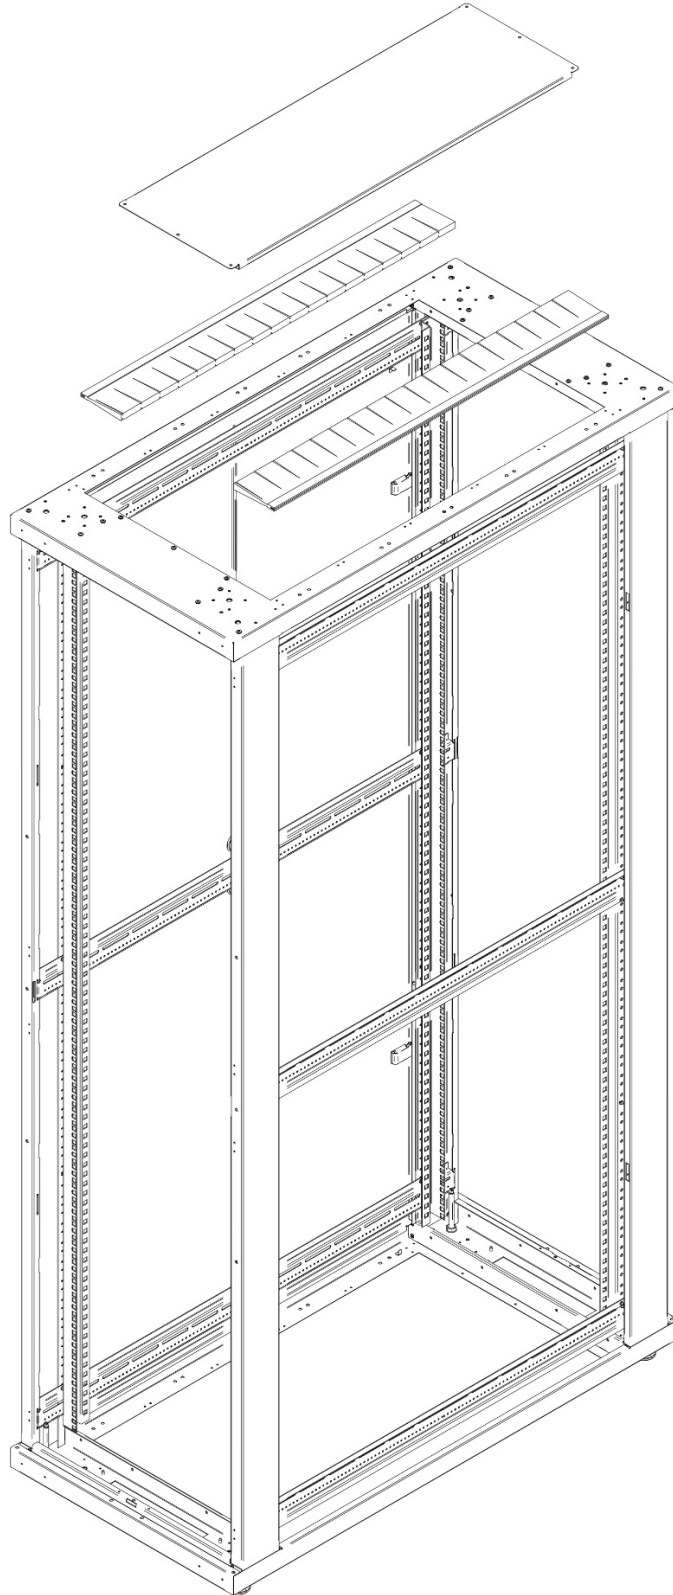


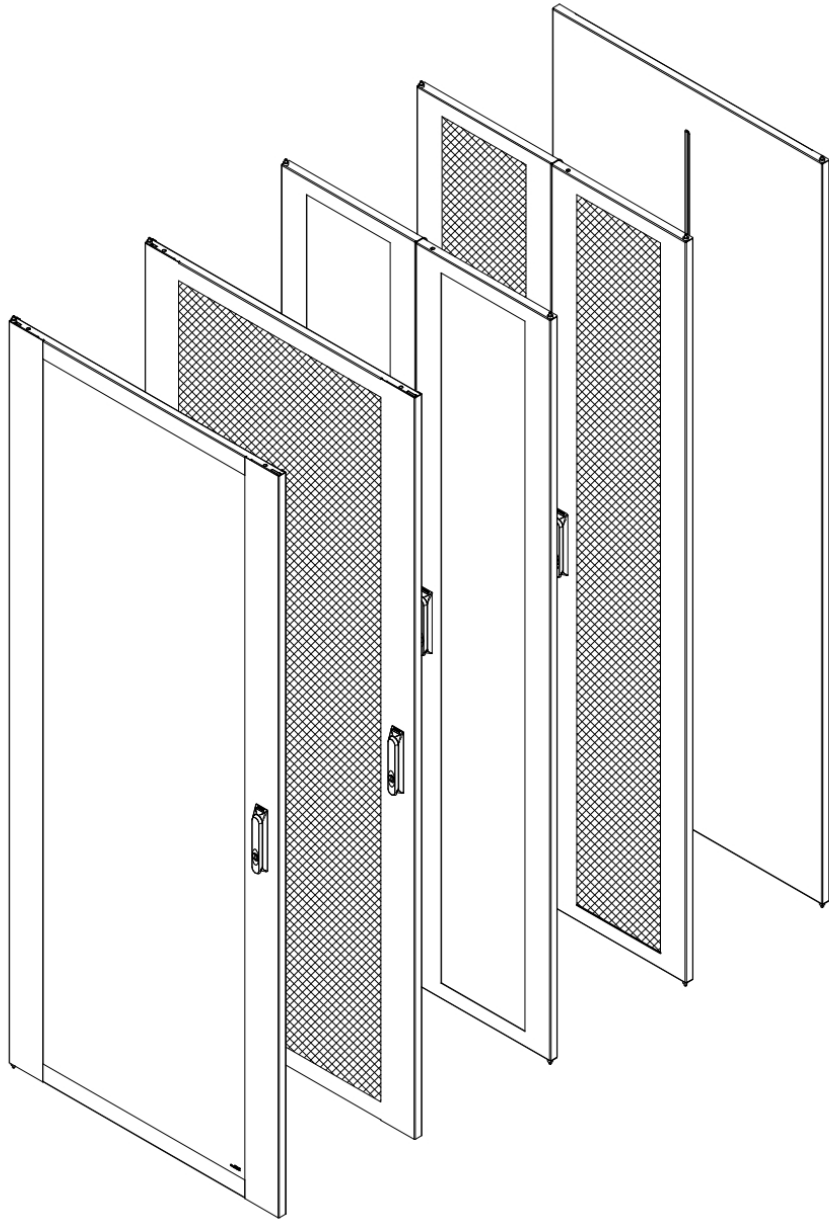

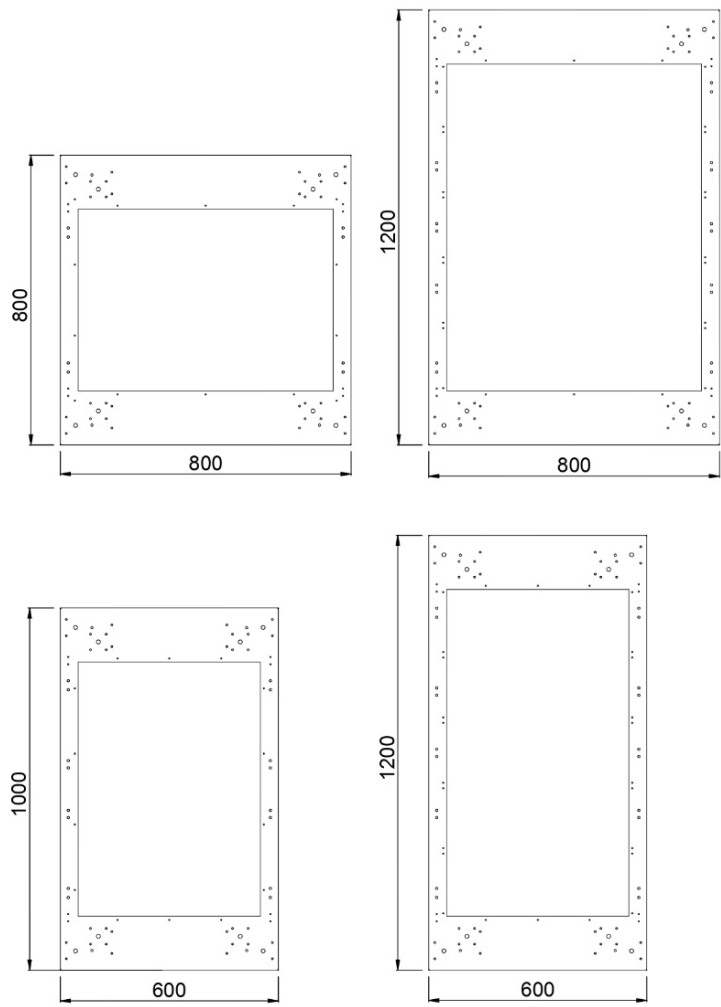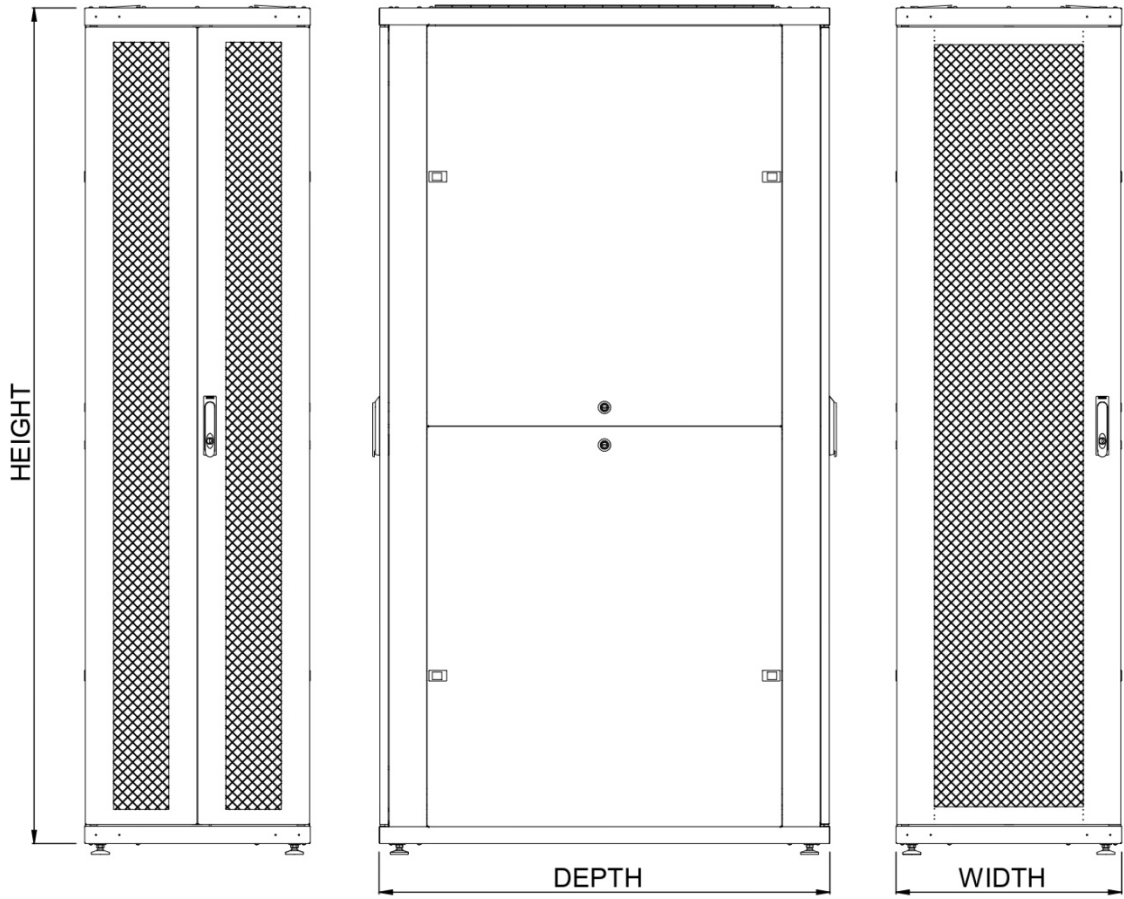

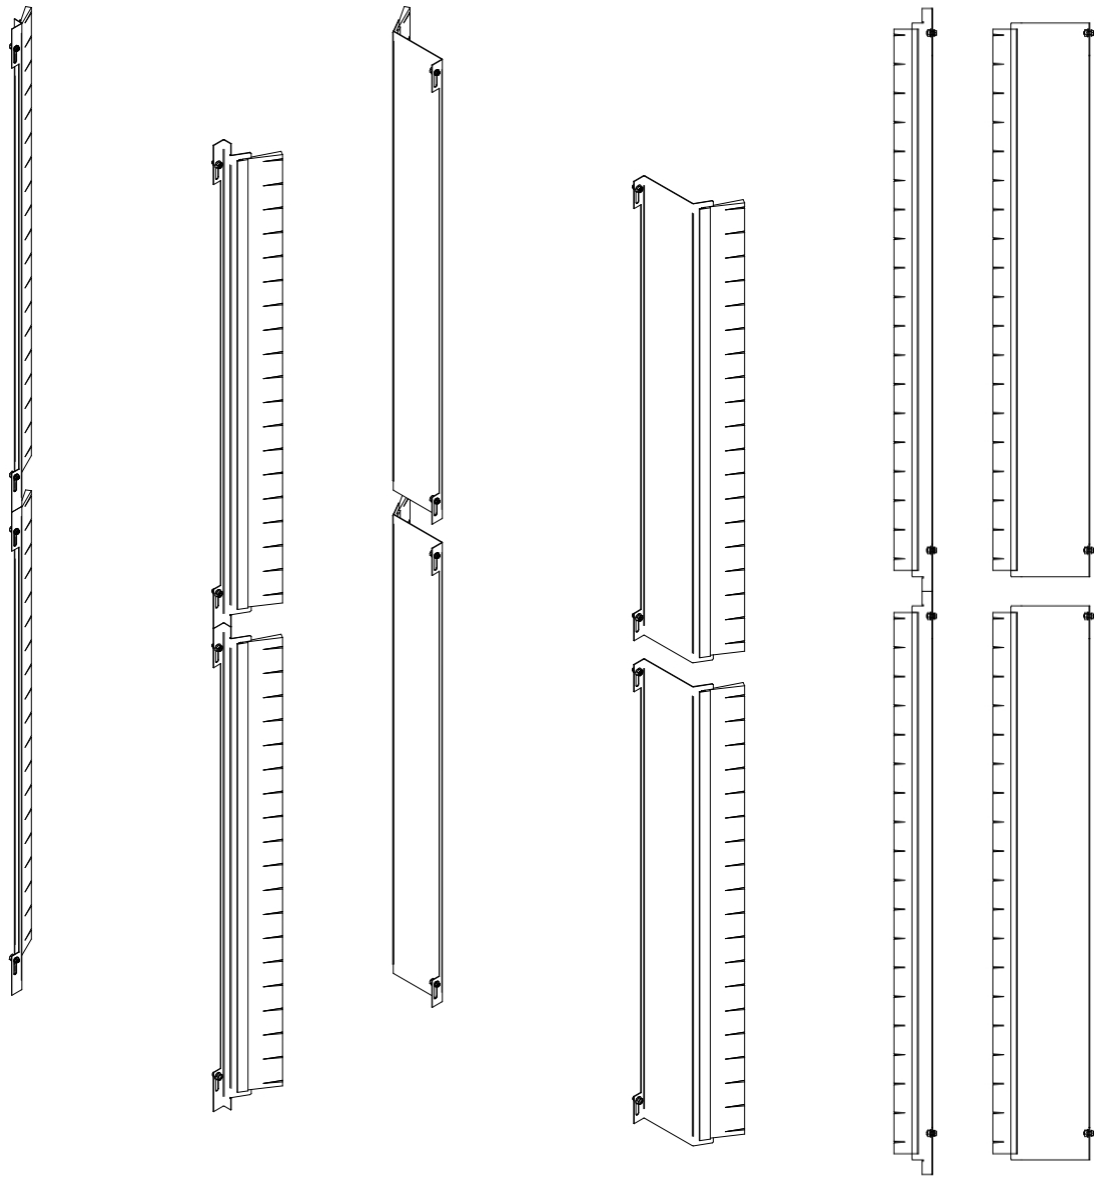

AIR-STOPPERS KIT W600 AND W800

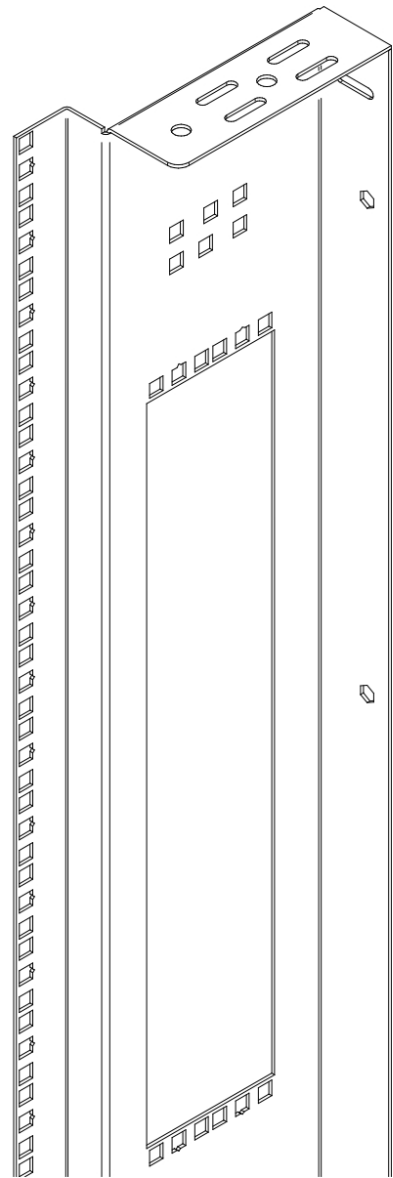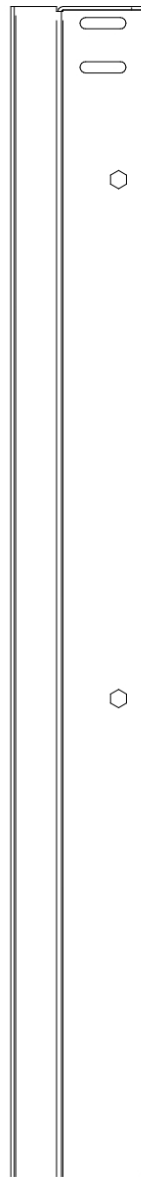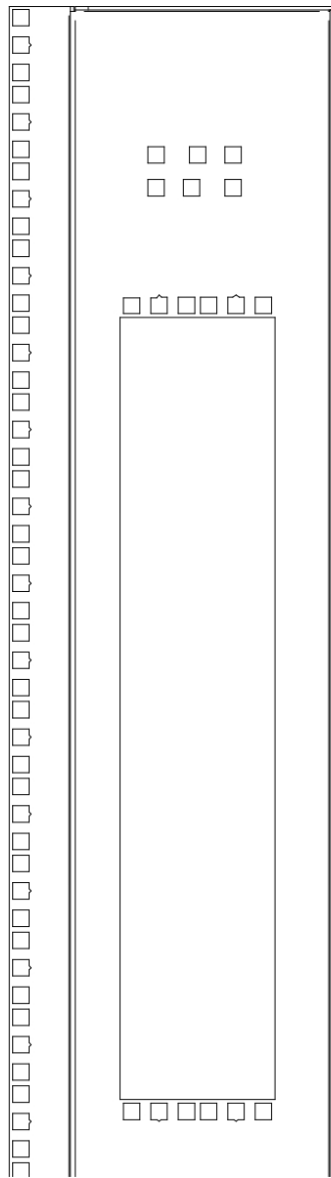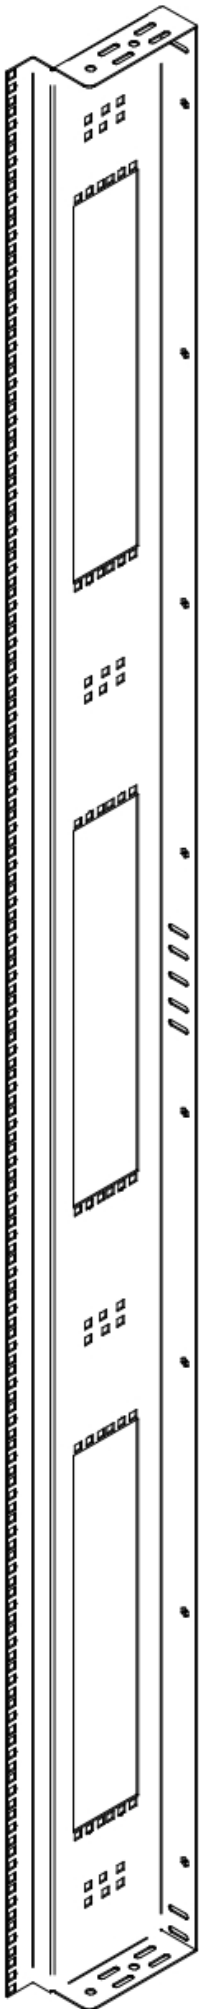

19" HIGH LOAD EXTRUSIONS